



Barre carrée de 50x50



Bras Arko avec sangle textile



Éclairage LED intégré dans le profil de charge (en option)

CARACTÉRISTIQUES

AVANCEE	DIMENSIONS			LARGEUR MAXIMUM
	LARGEUR MINIMUM			
	2-Bras	3-Bras	4-Bras	
2000	2910	4310	5351	12000
2500	3420	5070	6359	12000
3000	4000	5940	7519	12000
3500	4500	6700	8527	12000
4000	5010	7450	9535	12000

Plus de 7000 de Largeur, livré DÉMONTÉ



Classe II
Selon Norme EN13561



ÉCHELLE CLASSIFICATION AU VENT								
6000	7000	8000	9000	10000	11000	12000	L	A
2	3	3	3	4	4	4		2000
2	3	3	3	4	4	4		2500
2	3	3	3	4	4	4		3000
2	3	3	3	4	4	4		3500
2	2	3	3	4	4	4		4000

49 km/h Classe III 38 km/h Classe II 29 km/h Classe I Nombre de bras

INSTALLATION

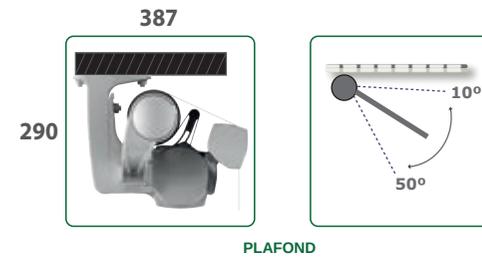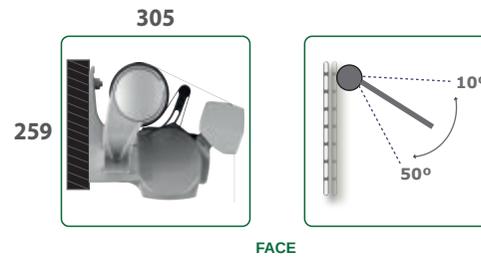

MANŒUVRE



MOTEUR
(Standard iO)



MOTEUR + TREUIL
(Moteur CSI)
EN OPTION

EN OPTION



LED
(Profil Charge)



PIED TÉLESCOPIQUE

CERTIFIÉ



MARQUE CE
EN 13561



VISSERIE



LAQUÉ

COULEURS BASE



COULEURS STANDARD



PLUS D'INFORMATIONS
APP



www.mecanotoldo.com

3092 20