







CARACTÉRISTIQUES

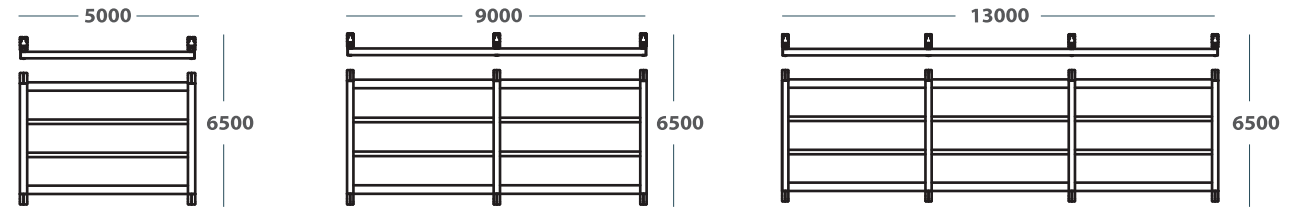

INSTALLATION

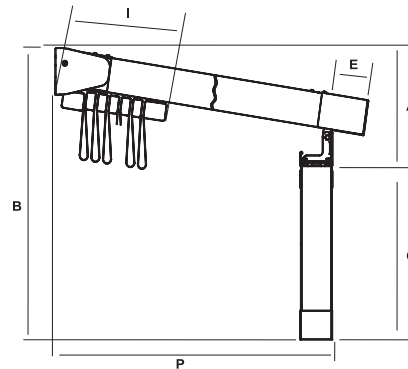

Pend.	A cm						N° Vagues	I	
	9,5%	11,5%	13,5%	14,5%	15%	15%		Palier	Fourreau
Campata	250	300	350	400	450	500			
200	44	48	52	54	55	55	3	46	39
250	49	54	59	62	63	63	4	50	43
300	54	60	66	69	70	70	5	55	48
350	59	66	73	76	78	78	6	60	53
400	63	71	79	83	85	85	7	64	57
450	68	77	86	91	93	93	8	69	62
500	73	83	93	98	100	100	9	74	67
550	78	89	100	105	108	108	10	78	71
600	82	94	106	112	115	115	11	83	76
650	87	100	113	120	123	123	12	88	81



MANŒUVRE



MOTEUR

EN OPTION



LED
(Profil Portetoile)



AUVENT



PROFIL MOTEUR

CERTIFIÉE



VISSERIE



MARQUE CE



PROTECTION
UV



TISSU
IGNIFUGE



GARANTIE
5
YEARS



COULEURS C-3



Ral 9010



Grigio Fer



Ral 1013



Ral 9016
Sablé



Ral 1013
Sablé



Ral 9006
Sablé



Ral 9010
Semilucide



Ral 1013
Semilucide



Ral 9006
Opaque



Corten

PLUS D'INFORMATIONS
APP



www.mecanotoldo.com