



Soportes y perfiles en aluminio



Toldo de dimensiones reducidas



Brazos a doble cable con sistema de tensión interna

CARACTERÍSTICAS

MEDIDAS		
SALIDA	LÍNEA MINIMA	LÍNEA MAXIMA
1000	1230	4500
1250	1474	4500
1500	1726	4500
1750	1980	4500
2000	2308	4500
2250	2560	4500
2500	2812	4500


Clase III
Según norma EN13561



49 km/h


ABACO CLASIFICACIÓN AL VIENTO							
1500	2000	2500	3000	3500	4000	4500	L / S
49 km/h Clase III	38 km/h Clase II	38 km/h Clase II	29 km/h Clase I	1000			
							1250
							1500
							1750
							2000
							2250
							2500

INSTALACIÓN

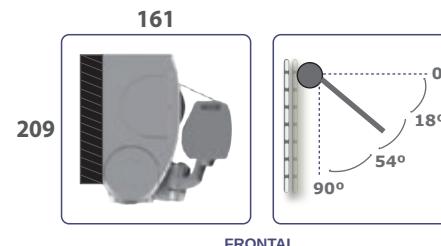


161
209

FRONTAL

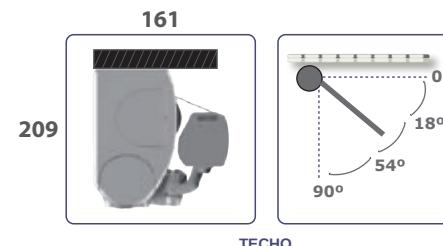

161
209


TECHO

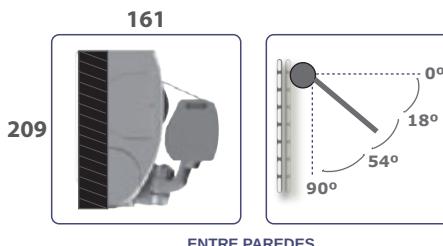

161
209

ENTRE PAREDES

ACCIONAMIENTO

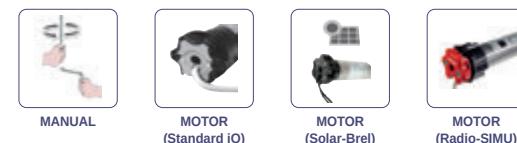

MANUAL

MOTOR
(Standard iO)

OPCIONAL

MOTOR
(Solar-Brel)

OPCIONAL

MOTOR
(Radio-SIMU)

OPCIONAL

CERTIFICACIONES



MARCA CE

GEOMET® 321

TORNILLERIA

LACADO

COLORES BASE



Blanco

Ral 1013

Ral 7016

Ral 7016
Texturado

Bronce
Texturado

Negro
Texturado

Ral 8014
Texturado

Plata
Texturado

COLORES STANDARD



Ral 8014

Ral 8017

Ral 8019

Ral 7035

Inox

Ral 7022

Ral 6005

Ral 6009

Ral 3005

MÁS INFORMACIÓN
APP

