



Barra cuadrada de 50X50



Brazos Arko con cinta Téxtil



Iluminación LED integrada en el perfil (opcional)

CARACTERÍSTICAS

SALIDA	LINEA MINIMA			LINEA MAXIMA
	2-Brazos	3-Brazos	4-Brazos	
2000	2719	3911	5103	12000
2500	3223	4667	6111	12000
3000	3803	5537	7271	12000
3500	4307	6293	8279	12000
4000	4811	7049	9287	12000
4500	5315	7805	10295	14000

Más de 7000 de línea, se sirve DESMONATDO



Clase II
Según norma EN13561




ABACO CLASIFICACION AL VIENTO							
6000	7000	8000	9000	10000	11000	12000	L/S
2	3	3	3	4	4	4	2000
2	3	3	3	4	4	4	2500
2	3	3	3	4	4	4	3000
2	3	3	3	4	4	4	3500
2	2	3	3	4	4	4	4000
2	2	3	3	4	4	4	4500

49 km/h Clase III 38 km/h Clase II 29 km/h Clase I Número de brazos


INSTALACIÓN

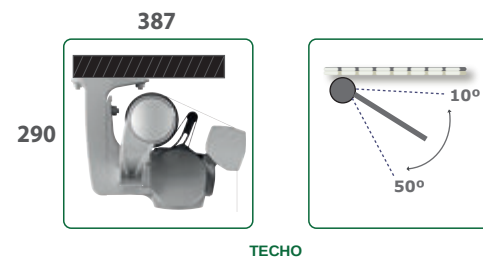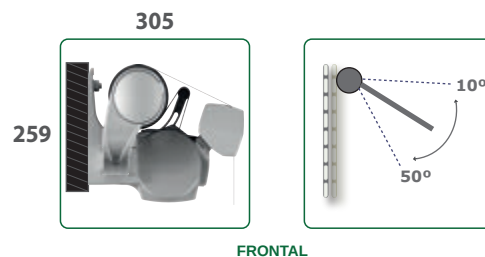

ACCIONAMIENTO

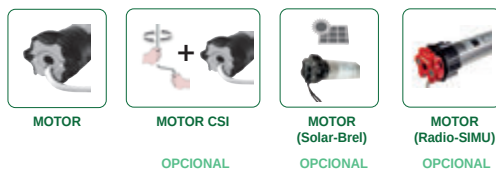

OPCIONES



CERTIFICACIONES



COLORES BASE



COLORES STANDARD



MÁS INFORMACIÓN
APP

