







CARACTERÍSTICAS

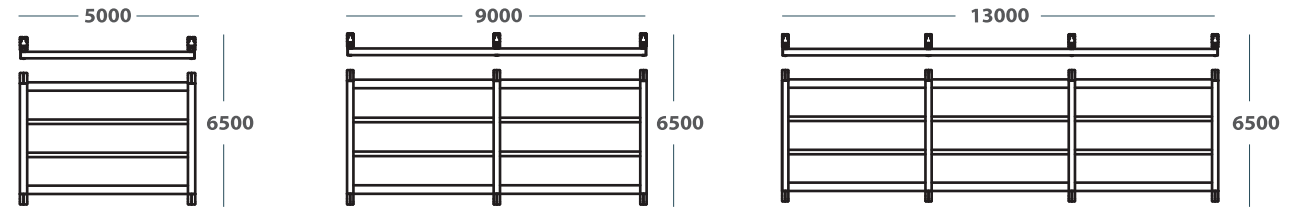

INSTALACIÓN

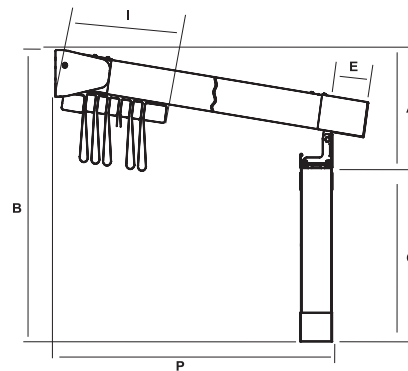

Pend.	A cm						Nº Ond s	I	
	9,5%	11,5%	13,5%	14,5%	15%	15%		Gaia	Vaina
Campata	250	300	350	400	450	500			
200	44	48	52	54	55	55	3	46	39
250	49	54	59	62	63	63	4	50	43
300	54	60	66	69	70	70	5	55	48
350	59	66	73	76	78	78	6	60	53
400	63	71	79	83	85	85	7	64	57
450	68	77	86	91	93	93	8	69	62
500	73	83	93	98	100	100	9	74	67
550	78	89	100	105	108	108	10	78	71
600	82	94	106	112	115	115	11	83	76
650	87	100	113	120	123	123	12	88	81



ACCIONAMIENTO



MOTOR

OPCIONES



LED
(Perfil Lona)



TEJADILLO



PERFIL MOTOR

CERTIFICACIONES



TORNILLERIA



MARCA CE



PROTECCION
UV



TEJIDO
IGNIFUGO



GUARANTY
5
YEARS



COLORES C-3



Ral 9010



Grigio Ferro



Ral 1013



Ral 9016
Sablé



Ral 1013
Sablé



Ral 9006
Sablé



Ral 9010
Semilucido



Ral 1013
Semilucido



Ral 9006
Opaco



Corten

MÁS INFORMACIÓN
APP



www.mecanotoldo.com