




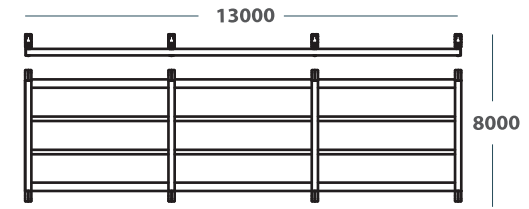

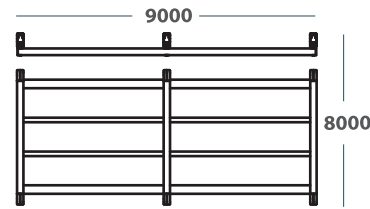


CARACTERÍSTICAS




INSTALACIÓN



FIJACION LATERAL



FIJACION FRONTAL

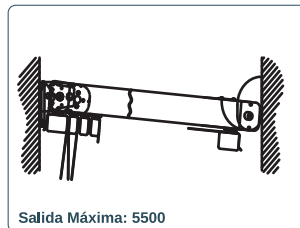

Salida Máxima: 5500

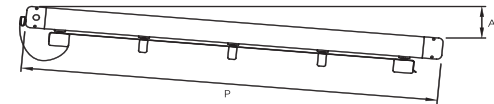

| Pend. | A cm | | | | | | Nº Ondas | I | |
|-------|------|-----|-----|-----|-----|-----|----------|------|-------|
| | 250 | 300 | 350 | 400 | 450 | 500 | | Gaia | Vaina |
| 9,5% | 19 | 23 | 27 | 29 | 30 | 30 | 3 | 46 | 39 |
| 11,5% | 24 | 29 | 34 | 37 | 38 | 38 | 4 | 50 | 43 |
| 13,5% | 29 | 35 | 41 | 44 | 45 | 45 | 5 | 55 | 48 |
| 14,5% | 34 | 41 | 48 | 51 | 53 | 53 | 6 | 60 | 53 |
| 15% | 38 | 46 | 54 | 58 | 60 | 60 | 7 | 64 | 57 |
| 15% | 43 | 52 | 61 | 66 | 68 | 68 | 8 | 69 | 62 |
| 15% | 48 | 58 | 68 | 73 | 75 | 75 | 9 | 74 | 67 |
| 15% | 53 | 64 | 75 | 80 | 83 | 83 | 10 | 78 | 71 |
| 15% | 57 | 69 | 81 | 87 | 90 | 90 | 11 | 83 | 76 |
| 15% | 62 | 75 | 88 | 95 | 98 | 98 | 12 | 88 | 81 |
| 15% | 67 | 81 | 95 | 102 | 105 | 105 | 13 | 93 | 86 |
| 15% | 72 | 87 | 102 | 109 | 113 | 113 | 14 | 97 | 90 |
| 15% | 76 | 92 | 108 | 116 | 120 | 120 | 15 | 102 | 95 |



ACCIONAMIENTO



MOTOR

OPCIONES



LED
(Perfil Lona)



TEJADILLO



PERFIL MOTOR

CERTIFICACIONES



TORNILLERIA



MARCA CE



PROTECCION
UV



TEJIDO
IGNIFUGO



GUARANTY
5
YEARS

COLORES C-3



Ral 9010



Ral 1013



Ral 9016
Sablé



Ral 1013
Sablé



Ral 9006
Sablé



Ral 9010
Semilucido



Ral 1013
Semilucido



Ral 9006
Opaco



Grigio Ferro



Corten



MÁS INFORMACIÓN
APP



www.mecanotoldo.com